

ASA1222E-S

Time & Attendance Terminal



Features

- TCP/IP based
- External electronic bell
- 2.4 inches TFT colorful screen
- Extremely speed verification
- Multiple verification methods (FP/PWD, only FP, only PWD)
- USB flash upgrade firmware
- Generate Smart Time Attendance reports in standalone
- 6 kinds of attendance events:
Check In/Out, Break In/Out, Over Time In/Out
- Daylight saving time
- T9 text input
- two user roles: administrator and normal user
- Administrator operation record display
- All users allowed to query his attendance records
- Human voice operation prompts

Technical Specification

Model	ASA1222E-S
System	
Main Processor	32 bit
Memory	16MB Flash
Interface	
TCP/IP	Yes
USB	Host
Relay	1 Relay (Electronic Bell)
Fingerprint	
Response Time	<1.5s
FAR	≤0.00004%
FRR	≤0.15%
Capacity	
Fingerprint	2,000
User	1,000
Attendance Records	100,000
Management Records	10,000
Function	
User Level	Admin, User
Schedule Mode	by User/by Department
Verification Mode	Fingerprint/Password, Only Fingerprint, Only Password

General


Voice Prompt	Yes
Power Supply	DC 5V/1000mA
Working Environment	-5°C ~ 55°C
Working Humidity	5% ~ 95%
Dimension(WxDxH)	175mm*120mm *23mm
Weight	0.35 KG

Certificates

CE	Yes
FCC	Yes

ASA1222E-S

Dimensions

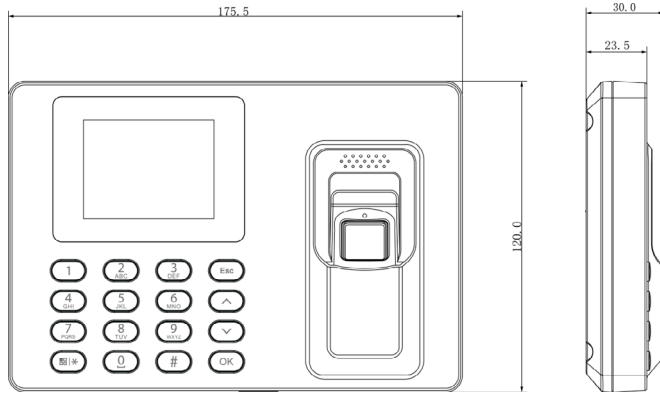

Application

