



YLI ELECTRONIC

# Electric Bolt with Cylinder



Model: YB-600A/B(LED)





## Parameters

Lock Body	270Lx30Wx48H(mm)
Magnetic Plate	100Lx25Wx2.5H(mm)
Bolt	16(prolongation)*16(diameter)(mm)
Signal Output	Lock signal(NO/NC/COM)
Time Delay	0/3/6/9sec
Voltage	12VDC
Current	Start 1200mA,Standby 200mA
Feature	Fail safe[YB-600A(LED)], Fail secure[YB-600B(LED)]
LED	Light on indicates locked, light off indicates unlocked
Detection Distance	Within 8mm
Suitable for	Wooden door,metal door,fireproof door,glass door
Material	304 stainless steel, wire draw finishing
Weight	1.6kg

## Dimensions

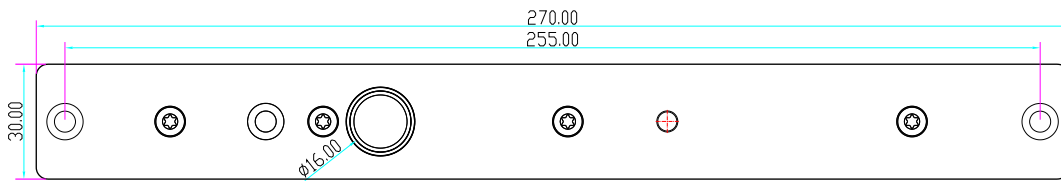







YB-600A(LED)

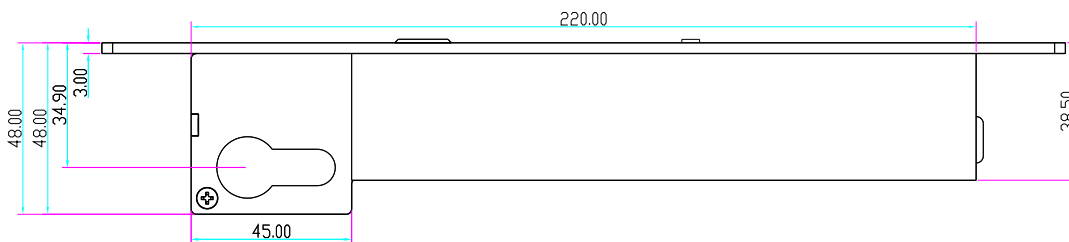


YB-600B(LED)

## Optional Accessory

Single side cylinder or both side cylinder, other sizes are available too: 80/90/100/110/120mm.

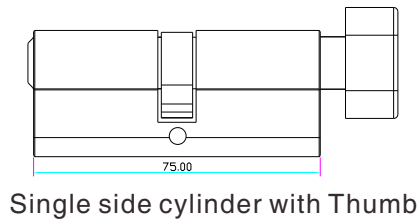

## Wiring Diagram

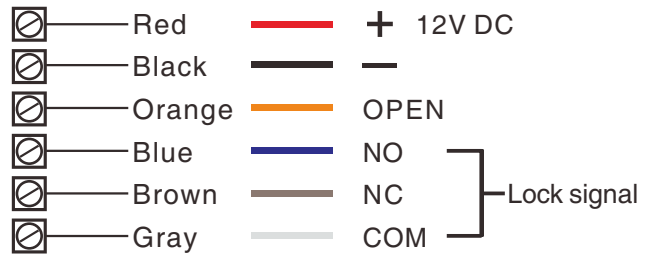


## Time Delay

Adjust the delay time for locking auto matically 0/3/6/9 secs.



## Installation steps

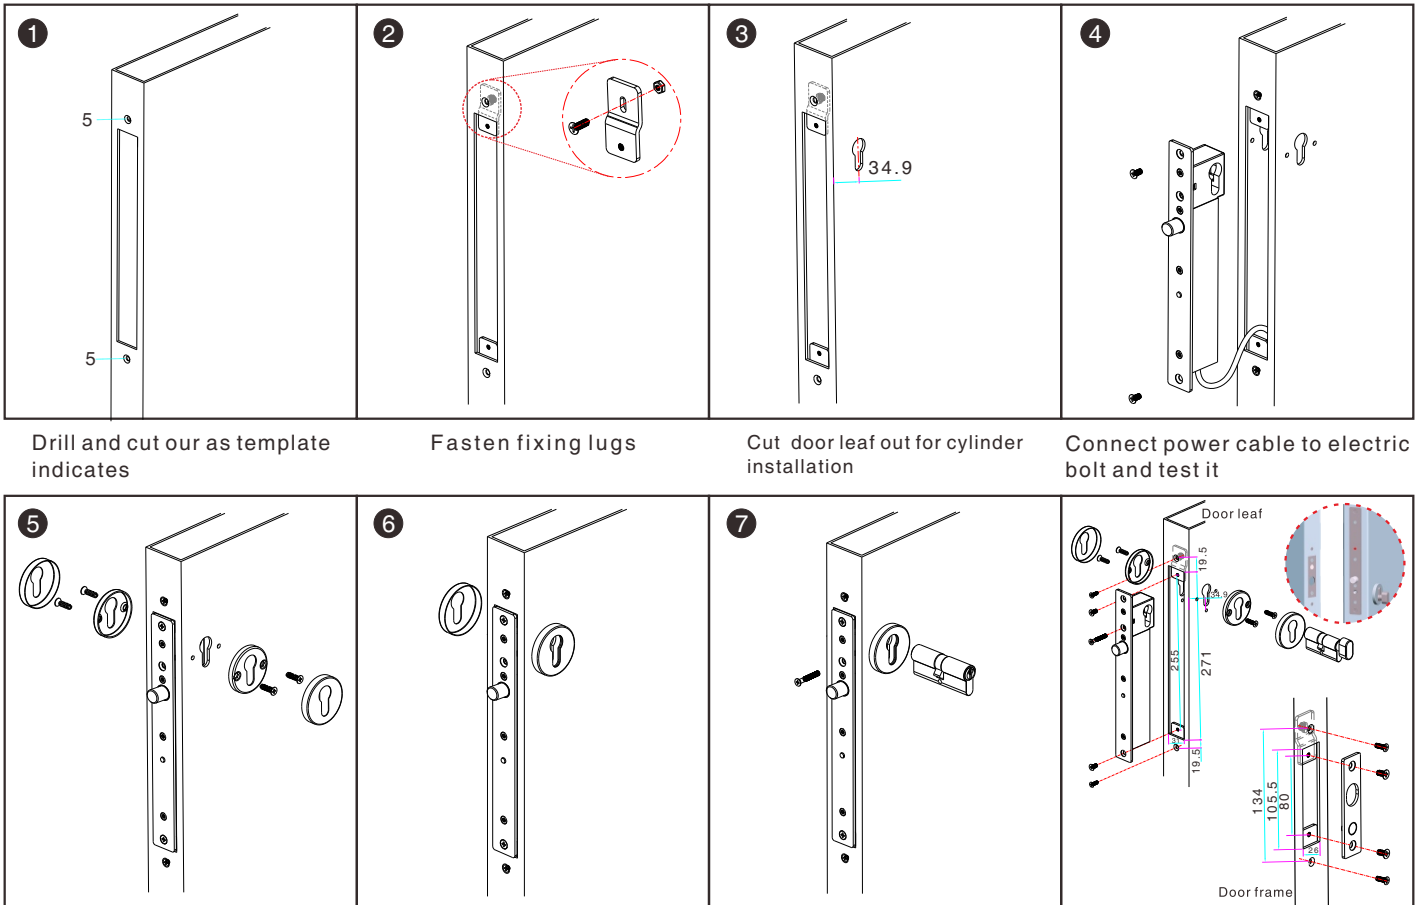

1 Drill and cut our as template indicates

2 Fasten fixing lugs

3 Cut door leaf out for cylinder installation

4 Connect power cable to electric bolt and test it

5 Mount electric bolt and cylinder

6 Fix cylinder's cover

7 Use long screw to tighten the cylinder

Installation Schematic