

Tiandy



TC-C32SS Spec:I3/A/E/Y/M/C/H/2.7-13.5mm/V4.0

2MP Motorized Starlight IR Turret Camera

Lite Series



KEY FEATURES

- Metal Housing
- Motorized Lens 2.7-13.5mm
- Up to 1920x1080@30fps
- S+265/H.265/H.264
- Min. illumination Color: 0.002Lux@F1.6
- Smart IR, IR Range: 30m
- Support tripwire and perimeter
- Built-in Mic, support max 512G Micro SD Card
- Audio I/O 1/1, Alarm I/O 1/1
- Operating Conditions -35°C~65°C, 0~95% RH
- DC12V,POE
- IP66



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com Tel: +86-22-58596065
Website: en.tiandy.com Fax: +86-22-58596048



SPECIFICATIONS

| | |
|-----------------------------|---|
| Camera | |
| Image Sensor | 1/2.8"CMOS |
| Min. Illumination | Color:0.002Lux@(F1.6,AGC ON),B/W:0Lux with IR |
| Shutter Time | 1s-1/100000s |
| Day&Night | IR-cut filter with auto switch (ICR) |
| WDR | 120dB |
| S/N | >42dB |
| Angle Adjustment | 0-340°;0-65°;0-360° |
| Lens | |
| Lens Type | Motorized |
| Focal Length | 2.7-13.5mm |
| Lens Mount | Φ14 |
| Aperture Range | F1.6,Fixed |
| Field of View | 102.9°-31.4°(H);55°-17.9°(V);116.7°-36.1°(D) |
| DORI Distance | W: Detect:37.2m Observe:14.7m Recognize:7.4m Identify:3.7m T: Detect:186.2m Observe:73.8m Recognize:37.2m Identify:18.6m |
| Illuminator | |
| IR LEDs | 2 |
| IR Distance | 30m |
| Wavelength | 850nm |
| White LEDs | N/A |
| Whitelight Distance | N/A |
| Compression Standard | |
| Video Compression | S+265/H.265/H.264B/H.264M/H.264H |
| Video Bit Rate | 32k-6Mbps |
| Audio Compression | G.711A/G.711U/ADPCM_D |
| Audio Sampling Rate | 8kHz/32kHz/48kHz |

Tiandy


| Image | |
|-----------------|---|
| Max. Resolution | 1920x1080@30fps |
| Main Stream | PAL: 25fps(1920x1080,1280x720,640x480,704x576) NTSC: 30fps(1920x1080,1280x720,640x480,704x480) |
| Sub Stream | PAL:25fps(704x576,704x288,640x360,352x288) NTSC:30fps(704x480,704x240,640x360,352x240) |
| Third Stream | N/A |
| BLC | Yes |
| HLC | Yes |
| AGC | Yes |
| 3D DNR | Yes |
| White Balance | Auto/Semi-auto/Manual/Sunny/Natural light/Warm light/Sodium lamp/Incandescent lamp/Locked white balance |
| ROI | 8 regions |
| Corridor mode | N/A |
| EIS | N/A |
| OSD | 1region;16*16/32*32/48*48 |
| Picture Overlay | N/A |
| Privacy Mask | 4 regions |
| Defog | Yes |
| Feature | |
| Alarm Trigger | Motion Detection;Mask Alarm;Disk Full;Disk R/W Error;IP Address Conflict;Event Input, Event Output |
| Linkage Method | trigger recording;trigger capture;notify surveillance center |
| Video Analytics | Tripwire;Perimeter |

Tiandy

| | |
|--------------------------------------|--|
| Rules of behavior analyse in 1 scene | 2 |
| Early Warning(EW) | N/A |
| Auto-Tracking | N/A |
| Face Mode | N/A |
| Face Detection Performance | N/A |
| Network | |
| ANR | ANR |
| Protocols | HTTP;HTTPS;TCP/IP;UDP;UPnP;ICMP;DHCP;DNS;DDNS;Easy DDNS;NTP;QoS;IPv4;SSH;Unicast;RTSP;FTP |
| System Compatibility | P2P(Mutually exclusive with Profile G);onvif Profile S/T/G;CGI;MIL STONE |
| Remote Connection | ≤2 |
| Client | Easy7 Smart Client |
| Moblie Client | EasyLive Plus |
| Web | IE10+;Firefox52+;Edge89+;Safari11+;Chrome57+ |
| Interface | |
| Communication Interface | 1 RJ45 10M/ 100M self adaptive Ethernet port |
| Audio I/O | 1channel in;1channel out |
| Alarm I/O | 1channel in,3mA,3.3VDC;1channel out,30mA,12VDC |
| Built-In Mic | Yes |
| Built-In Speaker | N/A |
| Reset Button | Yes |
| On-board storage | Built-in Micro SD card slot, up to 512 GB |
| Additional interfaces | N/A |
| General | |
| Web Client Language | 19languages Simple Chinese/Traditional Chinese/English/Spanish/Korean/Italian/Turkish/Russian/Thai/French/Polish/Dutch/Hebrew/Arabic/Vietnamese/German/Ukrainian/Portuguese/Albanian |
| Operating Temperature | -35°C-65°C |
| Operating Humidity | 0-95% |
| Storage Temperature | -35°C-65°C |
| Storage Humidity | 0-95%(non-condensing) |
| Power Supply | DC12V±25%,MAX 7W;POE 802.3af,MAX 8W |
| Protection | Surge protection 2000V;Lightning proof 6000V;IP66 |
| Boundary Dimensions | 132(L)132(W)108.2(H)mm |
| Package Dimensions | 180(L)170(W)130(H)mm |
| GrossWeight | 0.88kg |
| NetWeight | 0.68kg |

Tiandy

DIMENSIONS (Unit: mm)

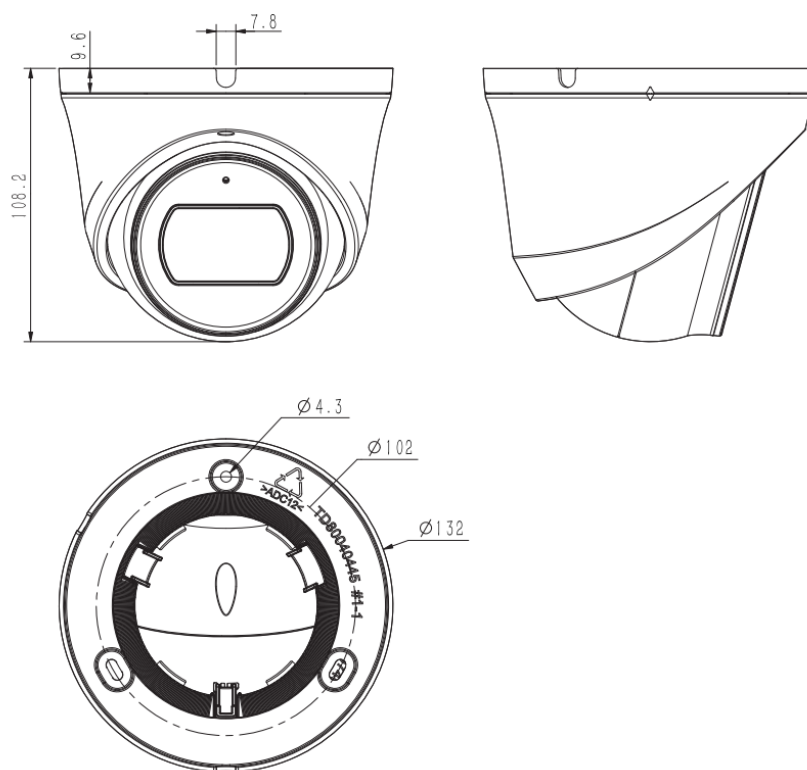

ACCESSORIES



TC-P54BM SpecV1



A28



A25



A35



A36



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com Tel: +86-22-58596065
Website: en.tiandy.com Fax: +86-22-58596048