

PFM800

Passive HDCVI Balun




Specifications

| | |
|---|---|
| Model | PFM800 |
| Properties | |
| Transmission Signal | 1 channel |
| Transmission Distance | 720P: 400M (max) 1080P: 250M (max) |
| Category Type | UTP CAT 5E/6 (R<10 Ω /100M) |
| Video Transmission Properties And Port | |
| Coaxial Video Connector | BNC-M |
| Twisted-pair Video Connector | Push-terminal |
| Compatible Format | HDCVI |
| Resolution | 720P/1080P |
| Anti-interference | >60db |
| Protection | |
| ESD | 1a contact discharge electricity level 3 |
| | 1b air discharge electricity level 3 |
| | Per: IEC61000-4-2 |
| Coaxial Cable Connector | 2KV(common-code) Per: IEC1000-4-5 |
| UTP Cable Connector | 2KV(different-code), 4KV(common-code), Per: IEC1000-4-5 |
| Impedance | |
| BNC Male | 75 ohms |
| UTP Cable | 100 ohms |
| Physical Properties | |
| Dimension(L*W*H) | 53mm*20mm*17mm |


PFM800

| | |
|-----------------------|-----------------------|
| Shell | ABS |
| Color | Black |
| N.W. | 25G |
| Stability | |
| MTBF | >10000H |
| Environmental | |
| Operating Temperature | -10~55°C |
| Storage Temperature | -20~70°C |
| Humidity | 0~95%(non-condensing) |

Dimensions (mm)

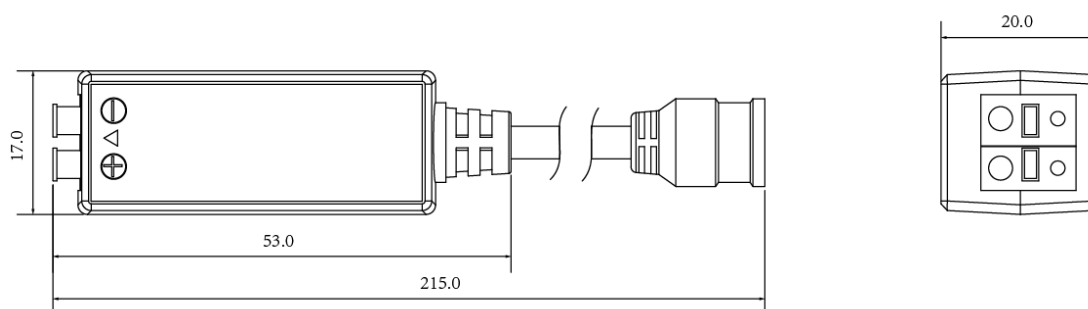

Application

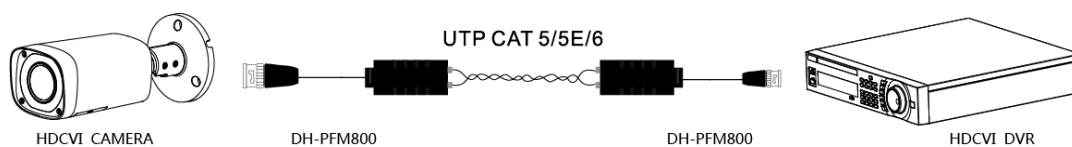

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.