


# QRN-810

8CH 8M H.265 NVR



---

## Key Features

- Up to 8CH, 8megapixel camera supported
- H.265, H.264, MJPEG codec support
- 100Mbps network camera recording
- Max. 1HDD, e-SATA supported
- HDMI / VGA local monitor
- ARB supported
- P2P service(QR code connect) support

## Display

Network camera	Inputs	Max. 16CH
	Resolution	8MP ~ CIF
	Protocols	Wisenet, ONVIF
Decoding	Local Display	[Clone Display] HDMI: 3840 x 2160, 1920x1080, 1280x720 VGA: 1920x1080, 1280x720
	Resolution	8MP(60fps), 5MP(90fps), 3MP(120fps), 2MP(240fps), 720p(240fps), D1(240fps)

## Performance

Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 100Mbps
	Resolution	8MP ~ CIF
	Mode	Normal, Schedule(Continuous/Event), Event (Pre/Post)
	Event Trigger	Alarm Input, Video Loss, Camera Event(Alarm, MD, Video Analytics, Defocus)
	Event Action	e-Mail, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max. 32Mbps(8CH simultaneously)
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 8CH(Local Monitor, Network)
	Fisheye Dewarping	WEB / CMS
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 1ea(Max. 6TB)
Backup	File backup	BU/Exe(GUI), JPG/AVI(Network)
	Function	Multi channel(Upto 8CH) Play, Date-Time/Title display

## Network

Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
DDNS	Wisenet DDNS	
Transmission Bandwidth	Max. 100Mbps	
Audio	Input/Output	8 CH(network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Max Remote Users	Search(3), Live Unicast(10), Multicast(20)	
Security	IP address filtering, User access Log, 802.1x, Encryption	
Web viewer	Supported OS	Windows 7, 8, 10, Mac OS X 10.9. 10.10. 10.11
	Supported browser	Plug-in free web viewer - Supported Browser: Google Chrome 47, MS Edge 20 Plug-in Webviewer - Supported MS Explore 11, Apple Safari 9 * Mac OS X only
Viewer Software	SSM, Webviewer, Smart Viewer, Wisenet mobile Support SDK/CGI(SUNAPI) for integration to 3'rd party VMS	

## Functions

Camera Setup	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer, SPC-2000
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(Multi-Profile Support), Playback
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	ARB	Support
Easy configuration		P2P(QR code)

## Interface

HDMI	1EA
VGA	1EA
Audio	Out(1EA, RCA, Line)
Ethernet	RJ-45(10/100/1000BASE-T) x 1
USB	2EA(Front 1, Rear 1)

## System

System Control	Mouse, IR remocn, Web, Controller
Language	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai

## Environmental

Operating Temperature	0°C to +40°C(32°F to 104°F)
Operating Humidity	20% ~ 85% RH


## Electrical

Power Input	12VDC / 4A
Power Consumption	MAX. 9W(31BTU, 2TB HDD x 1ea)

## Mechanical

Color / Material	Black / Metal
Dimension (WxHxD)	W300.0 x H47.1 x D208.4 mm (11.8" x 1.85" x 8.2") (1U)
Weight	1.655Kg (3.45lb), 2HDD

- The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

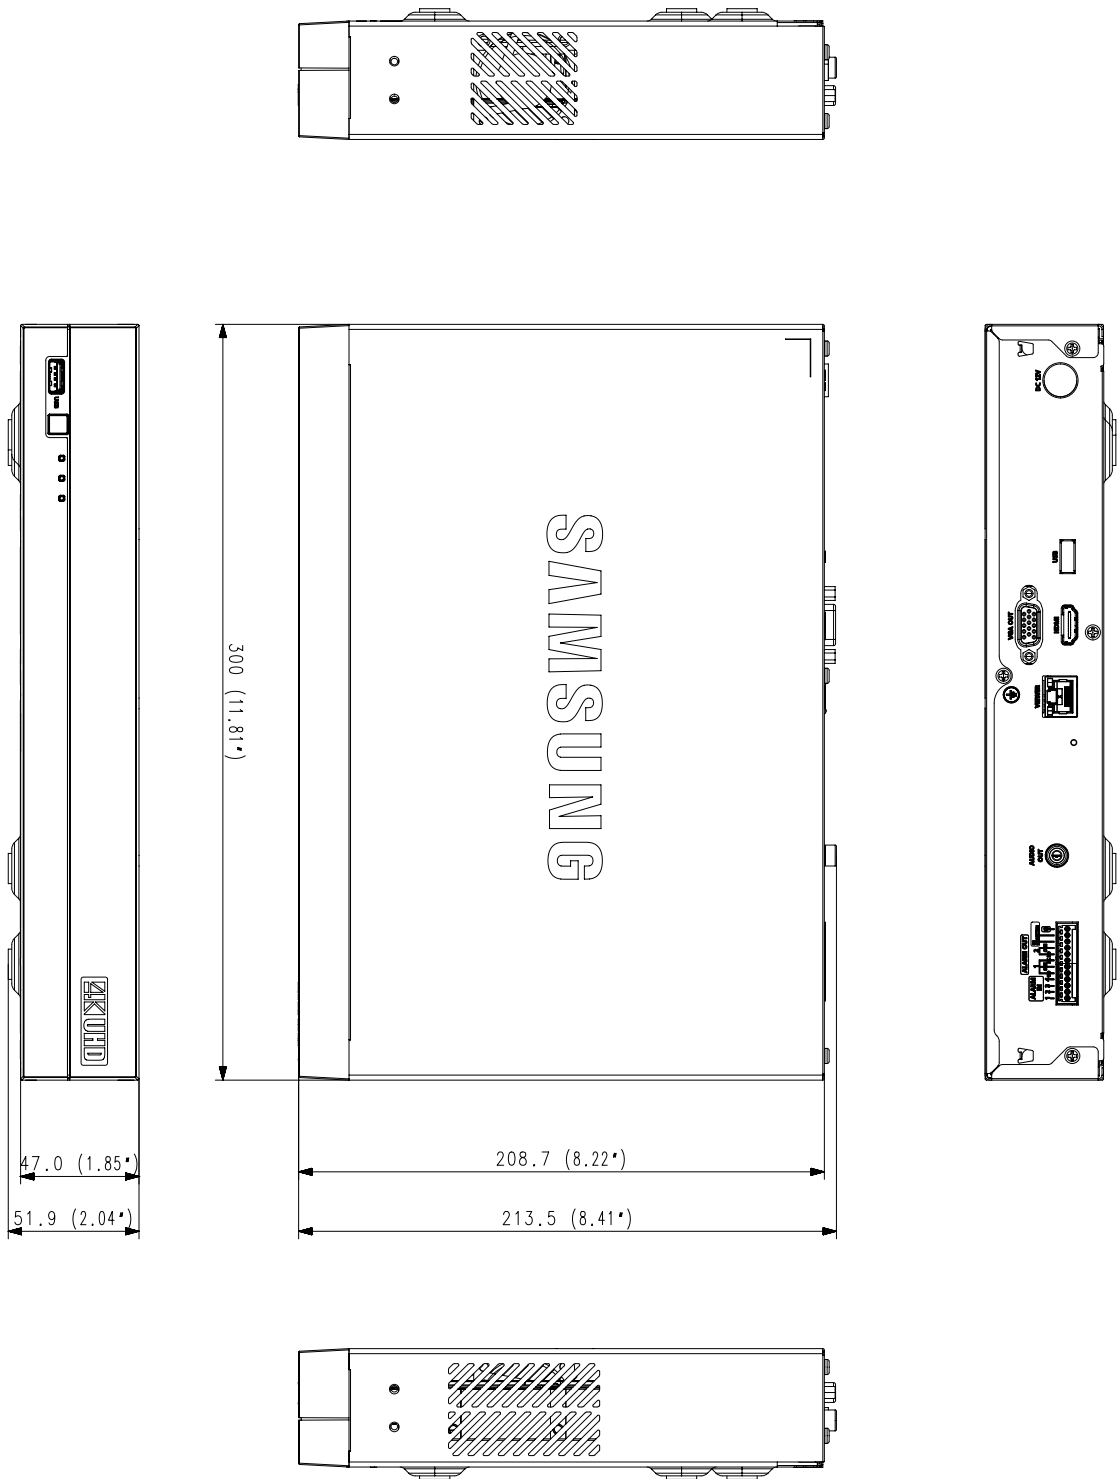

Unit: mm (inch)