

PFT1300

PoE Extender



Features


- > Support passive PoE cascade power supply and Ethernet data exchange
- > Support IEEE 802.3af/at standard power supply IP Camera
- > Cooperate with High PoE Midspan (PFT1200), able to cascade level 2 PoE Extender, connect to 3 IPC (power consumption $\leq 8W$), max transmission distance 300m
- > 1*RJ45 10/100M PoE power supply input; 1*RJ45 10/100M supply power for IP Cam; 1*RJ45 10/100M supply power for the next extender
- > Installation mode: junction box internal mounting, DIN rail mounting

PFT1300

Technical Specifications

Model	PFT1300
Ethernet port	1*10/100 Base-T PoE power receiving port 1*10/100 Base-T PoE power supply port, supply power for the next extender 1*10/100 Base-T PoE power supply port, supply power for IPC
Transmission Distance	Cooperate with DH-PFT1200, able to cascade level two extender, connect to 3 IPC (level one extender connects to 1 IPC, the OUT port of level two extender and CAMERA port connect to 1 IPC respectively, IPC power consumption <=8W), transmission distance is 300m
Power Consumption	<=3W
Application Humidity	10%—90%
High&Low temperature	- 30℃~65℃
Weight	57g
Dimension(W × D×H)	79mm×52mm×23mm

Application

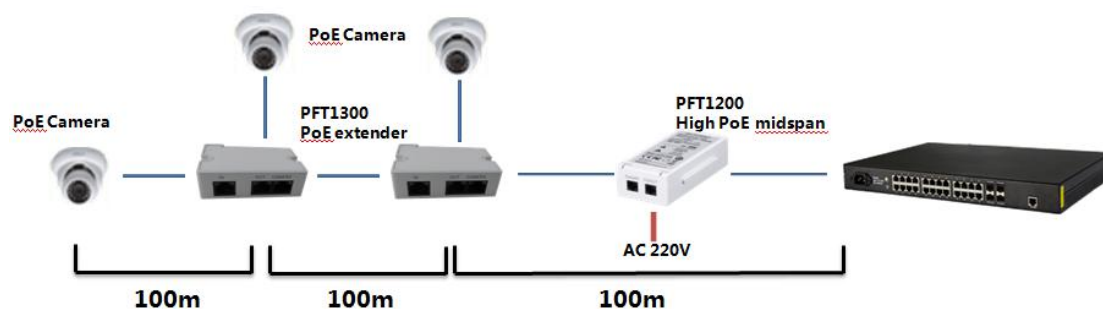

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email:overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.