

**DS-QAZ0206G1-S**  
**6 W Ceiling Secondary Speaker**




- Connecting the primary speaker for amplification.

**▪ Specification**

<b>Speaker</b>	
Rated Power	6 W
Impedance	8 Ω
Sensitivity(1 m, 1 W)	93 dB
Max. Acoustic Pressure	100 dB SPL
Direction	All directions
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
<b>Interface</b>	
Audio In	Fixed resistance input × 1 , 8 Ω *The primary speaker(6 W, 8 Ω) can be connected to a maximum of 1 secondary speaker(6 W, 8 Ω).
<b>General</b>	
Operating Temperature	10 °C to 50 °C
Material	Device body: plastic; Mesh cover: metal
Dimension	∅179 mm × 77.5 mm (∅7.05" × 3.05") (Hole Size: 160 mm)
Package Dimension	255 mm × 243 mm × 175 mm (10.04" × 9.57" × 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Packing List	Device × 1 Mesh cover × 1 Regulatory Compliance and Safety Information × 1
Operating Humidity	< 90% (No condensation)


**▪ Wiring**

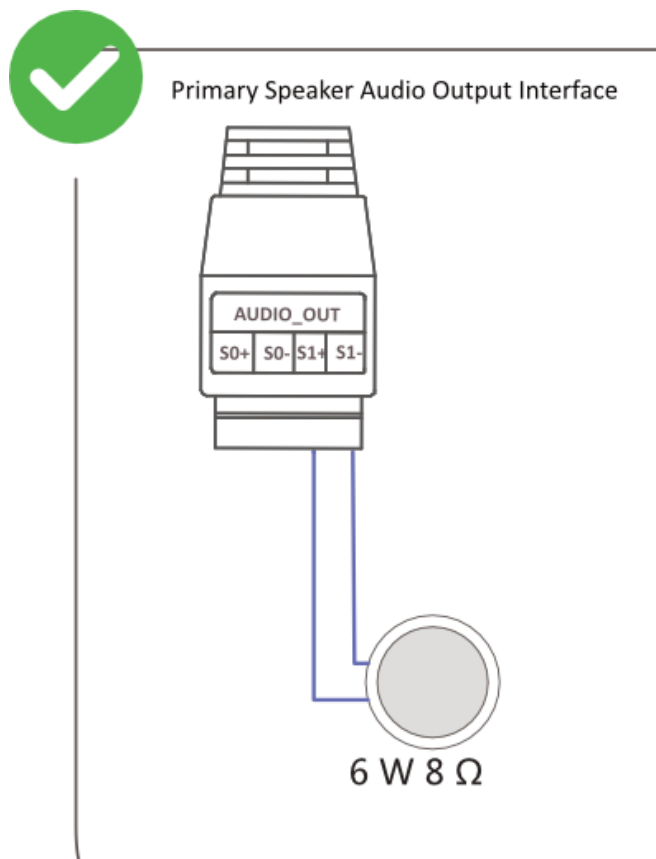

▪ **Available Model**

DS-QAZ0206G1-S

▪ **Dimension**

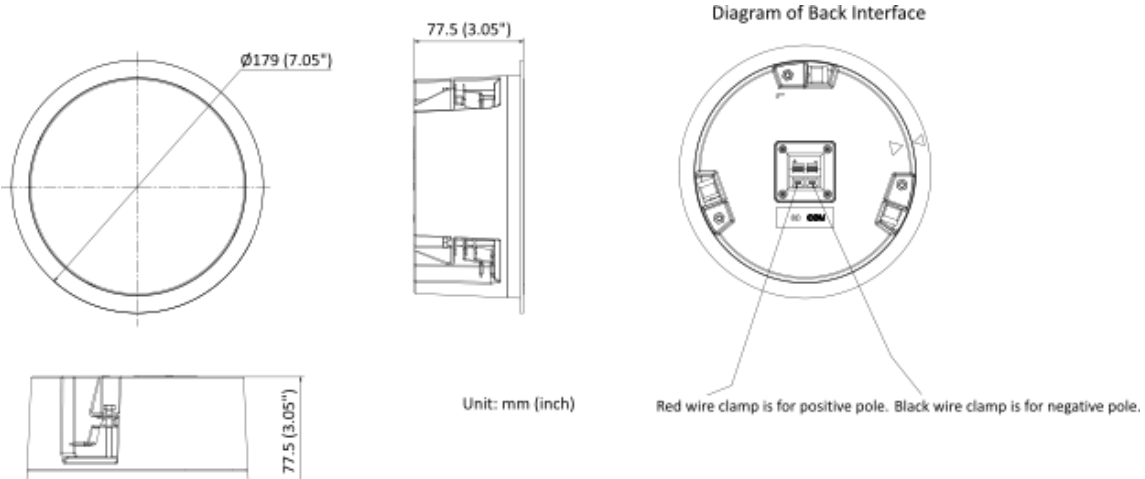



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq