

**HIKVISION**

**DS-2CD3547G2-LS**  
**4 MP ColorVu Fixed Mini Dome Network Camera**

**ColorVu**



- High quality imaging with 4 MP resolution
- Clear imaging against strong backlight due to 130 dB WDR technology
- Efficient H.265+ compression technology
- 24/7 colorful imaging
- Focus on human and vehicle classification based on deep learning
- Audio and alarm interface available
- Water and dust resistant (IP67) and vandal resistant (IK08)



[www.hikvision.com](http://www.hikvision.com)

**▪ Specification**

| <b>Camera</b>          |                                                                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor           | 1/1.8" Progressive Scan CMOS                                                                                                                                                         |
| Max. Resolution        | 2688 × 1520                                                                                                                                                                          |
| Shutter Speed          | 1/3 s to 1/100,000 s                                                                                                                                                                 |
| Min. Illumination      | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light                                                                                                                           |
| Day & Night            | 24/7 Color imaging                                                                                                                                                                   |
| Angle Adjustment       | Pan: -30° to 30°, tilt: 0° to 75°, rotate: 0° to 360°                                                                                                                                |
| <b>Lens</b>            |                                                                                                                                                                                      |
| Lens Type              | Fixed focal lens, 2.8 and 4 mm optional                                                                                                                                              |
| Focal Length & FOV     | 2.8 mm, horizontal FOV 112°, vertical FOV 61°, diagonal FOV 134°<br>4 mm, horizontal FOV 95°, vertical FOV 47°, diagonal FOV 115°                                                    |
| Lens Mount             | M16                                                                                                                                                                                  |
| Iris Type              | Fixed                                                                                                                                                                                |
| Aperture               | F1.0                                                                                                                                                                                 |
| Depth of Field         | 2.8 mm: 2.3 m to ∞<br>4 mm: 3.2 m to ∞                                                                                                                                               |
| <b>DORI</b>            |                                                                                                                                                                                      |
| DORI                   | 2.8 mm:<br>D: 58 m<br>O: 23 m<br>R: 11 m<br>I: 6 m<br>4 mm:<br>D: 77 m<br>O: 30 m<br>R: 16 m<br>I: 8 m                                                                               |
| <b>Illuminator</b>     |                                                                                                                                                                                      |
| Supplement Light Type  | White Light                                                                                                                                                                          |
| Supplement Light Range | Up to 30 m                                                                                                                                                                           |
| Smart Supplement Light | Yes                                                                                                                                                                                  |
| <b>Video</b>           |                                                                                                                                                                                      |
| Main Stream            | 50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720)<br>60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)                                                                         |
| Sub-Stream             | 50 Hz: 25 fps (640 × 480, 640 × 360)<br>60 Hz: 30 fps (640 × 480, 640 × 360)                                                                                                         |
| Third Stream           | 50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>*Third stream is supported under certain settings. |
| Fourth Stream          | 50 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)<br>*Fourth stream is supported under certain settings.                          |

|                             |                                                                                                                                                                                                                                  |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Compression           | Main stream: H.265/H.264/H.264+/H.265+<br>Sub-stream: H.265/H.264/MJPEG<br>Third stream: H.265/H.264<br>Fourth stream: H.265/H.264/MJPEG<br>*Third stream and fourth stream are supported under certain settings.                |
| Video Bit Rate              | 32 Kbps to 8 Mbps                                                                                                                                                                                                                |
| H.264 Type                  | Baseline Profile/Main Profile/High Profile                                                                                                                                                                                       |
| H.265 Type                  | Main Profile                                                                                                                                                                                                                     |
| Bit Rate Control            | CBR/VBR                                                                                                                                                                                                                          |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                                                                                                                         |
| Region of Interest (ROI)    | 5 fixed regions for main stream and sub-stream                                                                                                                                                                                   |
| Target Cropping             | Yes                                                                                                                                                                                                                              |
| <b>Audio</b>                |                                                                                                                                                                                                                                  |
| Environment Noise Filtering | Yes                                                                                                                                                                                                                              |
| Audio Sampling Rate         | 8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz                                                                                                                                                                                              |
| Audio Compression           | G.711ulaw/G.711alaw/G.722.1/G.726/MP2L2/PCM/MP3/AAC                                                                                                                                                                              |
| Audio Bit Rate              | 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC)                                                                                                   |
| <b>Network</b>              |                                                                                                                                                                                                                                  |
| Simultaneous Live View      | Up to 6 channels                                                                                                                                                                                                                 |
| API                         | Open Network Video Interface (PROFILE S, PROFILE G, PROFILE T), ISAPI, SDK, ISUP                                                                                                                                                 |
| Protocols                   | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, ARP, SNMP                                                                              |
| User/Host                   | Up to 32 users. 3 user levels: administrator, operator and user                                                                                                                                                                  |
| Security                    | Password protection, complicated password, HTTPS encryption, IP address filter, Security Audit Log, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE and digest authentication for Open Network Video Interface |
| Network Storage             | NAS (NFS, SMB/CIFS), auto network replenishment (ANR)<br>Together with high-end Hikvision memory card, memory card encryption and health detection are supported.                                                                |
| Client                      | iVMS-4200, Hik-Connect, Hik-Central                                                                                                                                                                                              |
| Web Browser                 | Plug-in required live view: IE 10+<br>Plug-in free live view: Chrome 57.0+, Firefox 52.0+<br>Local service: Chrome 57.0+, Firefox 52.0+                                                                                          |
| <b>Image</b>                |                                                                                                                                                                                                                                  |
| Wide Dynamic Range (WDR)    | 130 dB                                                                                                                                                                                                                           |
| SNR                         | ≥ 52 dB                                                                                                                                                                                                                          |
| Day/Night Switch            | Day, Night, Auto, Schedule                                                                                                                                                                                                       |
| Image Enhancement           | BLC, HLC, 3D DNR                                                                                                                                                                                                                 |
| Image Parameters Switch     | Yes                                                                                                                                                                                                                              |
| Image Settings              | Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance adjustable by client software or web browser                                                                                                       |
| <b>Interface</b>            |                                                                                                                                                                                                                                  |
| Ethernet Interface          | 1 RJ45 10 M/100 M self-adaptive Ethernet port                                                                                                                                                                                    |
| On-Board Storage            | Built-in memory card slot, support microSD card, up to 256 GB                                                                                                                                                                    |

|                                  |                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Built-in Microphone              | Yes                                                                                                                                                                                                                                                                                                                                                   |
| Audio                            | 1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 K $\Omega$ , interface type: non-equilibrium<br>1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 $\Omega$ , interface type: non-equilibrium                                                        |
| Alarm                            | -LS:<br>1 input, 1 output (max. 12 VDC, 20 mA)                                                                                                                                                                                                                                                                                                        |
| Reset Key                        | Yes                                                                                                                                                                                                                                                                                                                                                   |
| Power Output                     | 12 VDC, max. 100 mA                                                                                                                                                                                                                                                                                                                                   |
| <b>Event</b>                     |                                                                                                                                                                                                                                                                                                                                                       |
| Basic Event                      | Motion detection, video tampering alarm, exception                                                                                                                                                                                                                                                                                                    |
| Smart Event                      | Line crossing detection, intrusion detection, region entrance detection, region exiting detection, unattended baggage detection, object removal detection, scene change detection, audio exception detection                                                                                                                                          |
| Linkage                          | Upload to FTP/memory card/NAS, notify surveillance center, trigger recording, trigger capture, send email, audible warning                                                                                                                                                                                                                            |
| <b>Deep Learning Function</b>    |                                                                                                                                                                                                                                                                                                                                                       |
| Face Capture                     | Yes                                                                                                                                                                                                                                                                                                                                                   |
| Perimeter Protection             | Line crossing, intrusion, region entrance, region exiting<br>Support alarm triggering by specified target types (human and vehicle)                                                                                                                                                                                                                   |
| <b>General</b>                   |                                                                                                                                                                                                                                                                                                                                                       |
| Power                            | 12 VDC $\pm$ 25%, 0.54 A, max. 6.5 W, $\varnothing$ 5.5 mm coaxial power plug, reverse polarity protection<br>PoE: (802.3af, Class 3, 36 V to 57 V), 0.22 A to 0.14 A, max. 8 W                                                                                                                                                                       |
| Camera Material                  | Base: aluminum, cover: plastic                                                                                                                                                                                                                                                                                                                        |
| Camera Dimension                 | $\varnothing$ 113.6 mm $\times$ 72.6 mm ( $\varnothing$ 4.5" $\times$ 2.9")                                                                                                                                                                                                                                                                           |
| Package Dimension                | 134 mm $\times$ 134 mm $\times$ 108 mm (5.3" $\times$ 5.3" $\times$ 4.3")                                                                                                                                                                                                                                                                             |
| Camera Weight                    | Approx. 400 g (0.9 lb.)                                                                                                                                                                                                                                                                                                                               |
| With Package Weight              | Approx. 635 g (1.4 lb.)                                                                                                                                                                                                                                                                                                                               |
| Storage Conditions               | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                     |
| Startup and Operating Conditions | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                     |
| Language                         | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| General Function                 | Anti-flicker, heartbeat, mirror, privacy mask, flash log, password reset via email, pixel counter                                                                                                                                                                                                                                                     |
| <b>Approval</b>                  |                                                                                                                                                                                                                                                                                                                                                       |
| EMC                              | FCC (47 CFR Part 15, Subpart B)<br>CE-EMC (EN 55032: 2015, EN 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014)<br>IC (ICES-003: Issue 7)<br>KC (KN32: 2015, KN35: 2015)                                                                                                                                                       |

|                              |                                                                                                                                                                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety                       | UL (UL 62368-1)<br>CB (IEC 62368-1: 2014+A11)<br>CE-LVD (EN 62368-1: 2014/A11: 2017)<br>LOA (IEC/EN 60950-1)<br>BIS (IS 13252 (Part 1): 2010/IEC 60950-1: 2005) |
| Environment                  | CE-RoHS (2011/65/EU)<br>WEEE (2012/19/EU)<br>Reach (Regulation (EC) No 1907/2006)                                                                               |
| Electrical Safety Protection | IP67 (IEC 60529-2013)<br>IK08 (IEC 62262: 2002)                                                                                                                 |

### ▪ Available Model

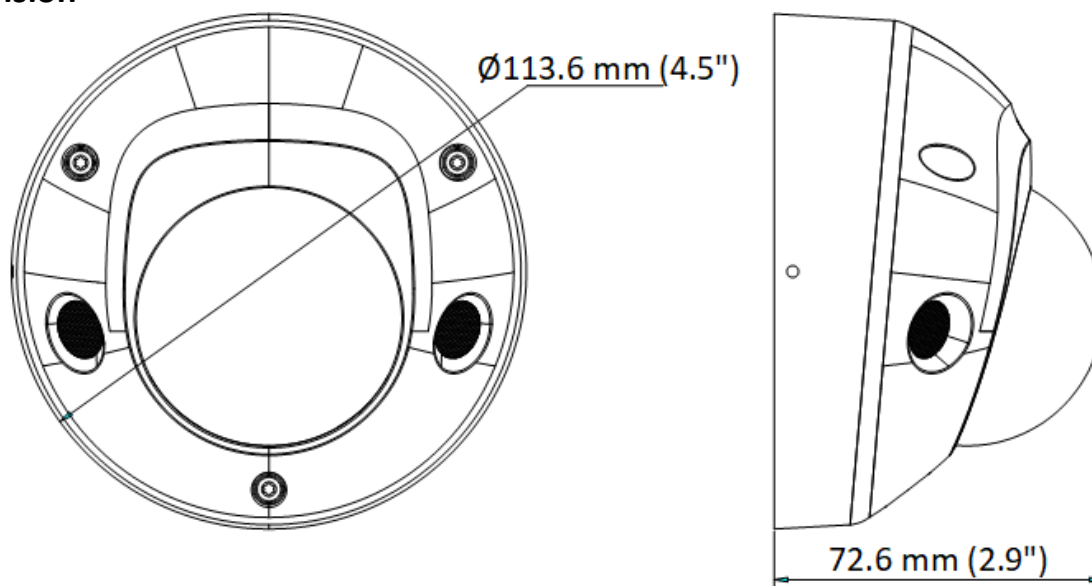
DS-2CD3547G2-LS (2.8/4 mm)

### ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

| Level                  | Description                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Top-level protection   | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.                                             |
| Moderate protection    | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.                                                                                                                                  |

▪ **Dimension**

Unit: mm (inch)

▪ **Accessory**▪ **Optional**

| DS-1276ZJ-SUS<br>Corner Mount                                                       | DS-1275ZJ-SUS<br>Vertical Pole Mount                                                | DS-1275ZJ-SUS(Black)<br>Vertical Pole Mount                                         | DS-1272ZJ-120<br>Wall Mount                                                           | DS-1280ZJ-DM46(Black)<br>Junction Box                                                 |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |   |  |
| DS-1276ZJ-SUS(Black)<br>Corner Mount                                                | DS-1280ZJ-DM46<br>Junction Box                                                      | DS-1272ZJ-120B<br>Wall Mount                                                        | DS-1271ZJ-120(Black)<br>Pendant Mount                                                 | DS-1271ZJ-120<br>Pendant Mount                                                        |
|  |  |  |  |  |

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[overseasbusiness@hikvision.com](mailto:overseasbusiness@hikvision.com)

**Hikvision USA**  
T +1-909-895-0400  
[sales.usa@hikvision.com](mailto:sales.usa@hikvision.com)

**Hikvision Australia**  
T +61-2-8599-4233  
[salesau@hikvision.com](mailto:salesau@hikvision.com)

**Hikvision India**  
T +91-22-28469900  
[sales@pramahikvision.com](mailto:sales@pramahikvision.com)

**Hikvision Canada**  
T +1-866-200-6690  
[sales.canada@hikvision.com](mailto:sales.canada@hikvision.com)

**Hikvision Thailand**  
T +662-275-9949  
[sales.thailand@hikvision.com](mailto:sales.thailand@hikvision.com)

**Hikvision Europe**  
T +31-23-5542770  
[sales.eu@hikvision.com](mailto:sales.eu@hikvision.com)

**Hikvision Italy**  
T +39-0438-6902  
[info.it@hikvision.com](mailto:info.it@hikvision.com)

**Hikvision Brazil**  
T +55 11 3318-0050  
[Latam.support@hikvision.com](mailto:Latam.support@hikvision.com)

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
[sales.tr@hikvision.com](mailto:sales.tr@hikvision.com)

**Hikvision Malaysia**  
T +601-7652-2413  
[sales.my@hikvision.com](mailto:sales.my@hikvision.com)

**Hikvision UK & Ireland**  
T +01628-902140  
[sales.uk@hikvision.com](mailto:sales.uk@hikvision.com)

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
[sale.africa@hikvision.com](mailto:sale.africa@hikvision.com)

**Hikvision France**  
T +33(0)1-85-330-450  
[info.fr@hikvision.com](mailto:info.fr@hikvision.com)

**Hikvision Kazakhstan**  
T +7-727-9730667  
[nikia.panfilov@hikvision.ru](mailto:nikia.panfilov@hikvision.ru)

**Hikvision Vietnam**  
T +84-974270888  
[sales.vt@hikvision.com](mailto:sales.vt@hikvision.com)

**Hikvision UAE**  
T +971-4-4432090  
[salesme@hikvision.com](mailto:salesme@hikvision.com)

**Hikvision Singapore**  
T +65-6684-4718  
[sg@hikvision.com](mailto:sg@hikvision.com)

**Hikvision Spain**  
T +34-91-737-16-55  
[info.es@hikvision.com](mailto:info.es@hikvision.com)

**Hikvision Tashkent**  
T +99-87-1238-9438  
[uzb@hikvision.ru](mailto:uzb@hikvision.ru)

**Hikvision Hong Kong**  
T +852-2151-1761  
[info.hk@hikvision.com](mailto:info.hk@hikvision.com)

**Hikvision Russia**  
T +7-495-669-67-99  
[saleru@hikvision.com](mailto:saleru@hikvision.com)

**Hikvision Korea**  
T +82-(0)31-731-8817  
[sales.korea@hikvision.com](mailto:sales.korea@hikvision.com)

**Hikvision Poland**  
T +48-22-460-01-50  
[info.pl@hikvision.com](mailto:info.pl@hikvision.com)

**Hikvision Indonesia**  
T +62-21-2933759  
[Sales.Indonesia@hikvision.com](mailto:Sales.Indonesia@hikvision.com)

**Hikvision Colombia**  
[sales.colombia@hikvision.com](mailto:sales.colombia@hikvision.com)