


VTH5221E(W)-H

VTH5221E(W)-H

IP Indoor Monitor

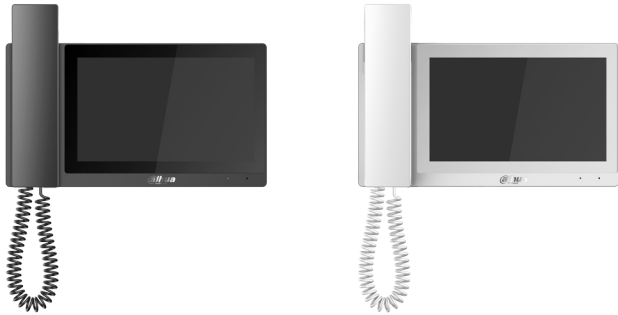

Features

- 7" TFT Capacitive touch screen, 1024x600
- IPC surveillance
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)



Technical Specification

Model	VTH5221E(W)-H
-------	---------------

System

Main Processor	Embedded Micro Processor
----------------	--------------------------

Operation System	Embedded LINUX OS
------------------	-------------------

Video

Video Compression	H.264
-------------------	-------

Audio

Audio Compression	G.711
-------------------	-------

Audio Input	All-direction Microphone
-------------	--------------------------

Audio Output	Built-in Loudspeaker
--------------	----------------------

Bidirectional Talk	Support Dual-way Bidirectional talk
--------------------	-------------------------------------

Display

LCD Screen	7" 1024x600, Capacitive
------------	-------------------------

Operation Mode

Input	Touch screen
-------	--------------

Interface

Alarm In	6
----------	---

Alarm Out	1
-----------	---

RS485	1
-------	---

Network

Ethernet	10M/100Mbps Self-adaptive
----------	---------------------------

Network Protocol	TCP/IP
------------------	--------


General

Memory Slot	Micro SD, Max 32GB
-------------	--------------------


Installation	Surface & Desktop
Power	DC 12V, PoE(802.3af)
Power Consumption	Standby ≤3.5W, Work ≤5W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	236mm×165.5mm×43.2mm
Weight	0.9Kg

VTH1550CHM

Dimensions

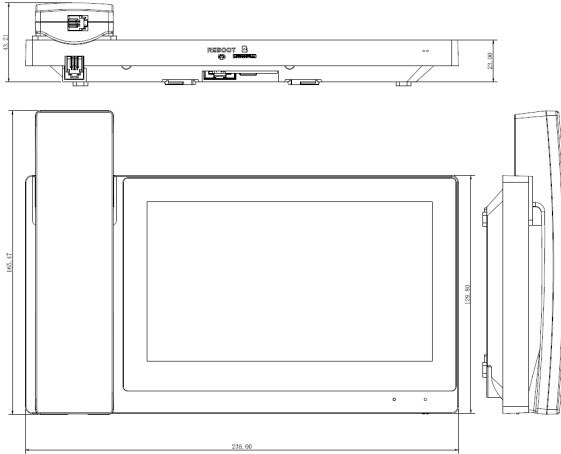

View Area



Application

